




CROSS X PLUS

Balloon Dilatation Catheter

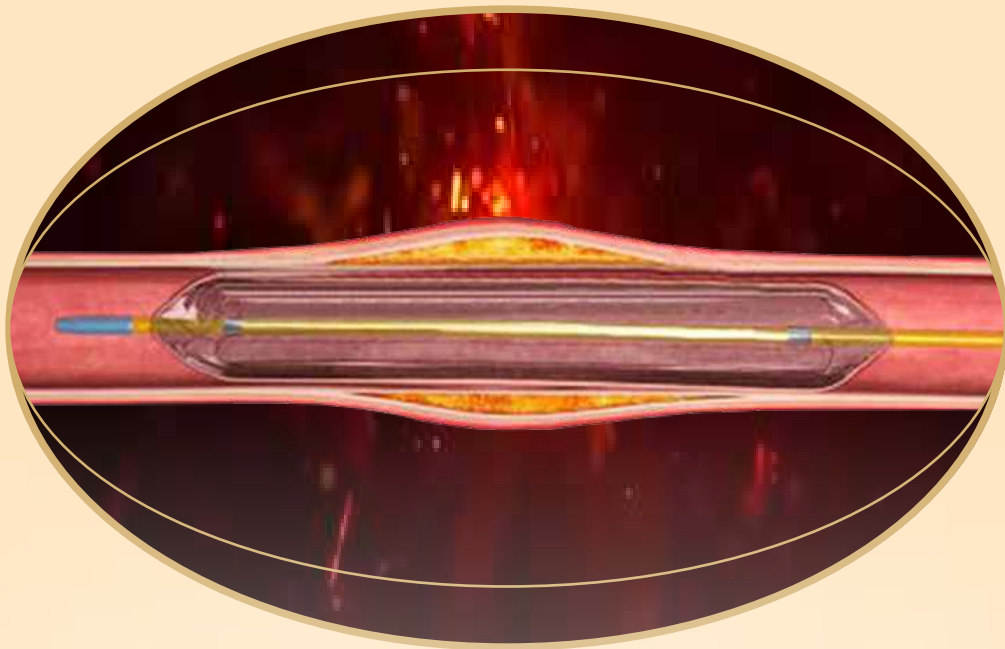

HEALING SOLUTIONS...

CROSS X PLUS

NON COMPLIANT DILATATION CATHETER

CROSS X PLUS NC

NON COMPLIANT DILATATION CATHETER

TECHNICAL SPECIFICATIONS

Category:	Rapid Echange Balloon Cather	Category:	Non Complaint
Guiding Catheter Compatibility:	5F	Material	Polyamide
Guidewire Compatibility	0.014"	X-Ray visibility:	Two markers
Usable Catheter length	140 cm	Nominal Pressure	12 atm
Proximal Shaft:	Stainless steel AISI 304, low friction hypotube with Teflon coating	Rated Burst Pressure	22 atm [2.00 to 4.50mm]
Distal Shaft:	Mix Polyamide / PEBA with Hydrophilic coating	Average Burst Preesure	28 atm
Tip material / entry profile	0.017"		
Folds	3		

ORDERING INFORMATION

DIA ↓	Length ↕	LENGTH			
2.00	08	10	12	15	20
2.50	08	10	12	15	20
2.75	08	10	12	15	20
3.00	08	10	12	15	20
3.50	08	10	12	15	20
4.00	08	10	12	15	20
4.50	08	10	12	15	20

Advanced Laser welding Technology to realize seamless connection between head and tube.

Tri-Fold Shape Memory Technology offers excellent rewarpability for multiple inflation uses.

Silicone Resin into The Guidewire Lumen to create a smooth, low-friction path for seamless guidewire movement through the catheter.



Marketed by:

Cognitive Health Technologies Pvt. Ltd.

2nd Floor, Plot No. 64, Industrial Area,
Phase II, Chandigarh 160002.

E-mail: office@cognitivehealthtechnologies.com

www.cognitivehealthtechnologies.com